

# RL8 Resistance ON-OFF rope sensor

825B068F

Resistance ON-OFF rope sensor, also with more electrodes (max.5), for conductor's liquids. IP65 protection.

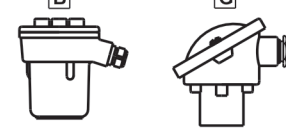

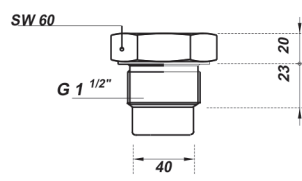
**ORDER CODE (Example) RL8** **B** **1** **8** **E** **8** **1**

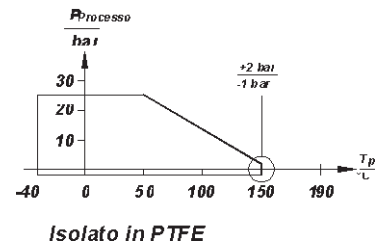
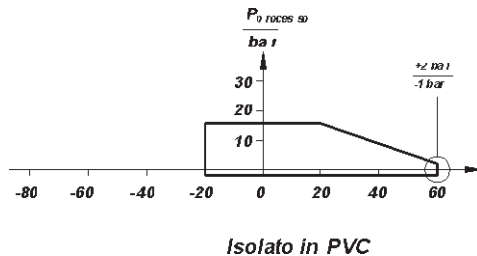
Version  
PC polycarbonate loaded

Process connection  
PVC 1 1/2" G

Electrode number  
4 electrodes

Electrode and insulation type  
Ø1 AISI316, PVC insulated

VERSION	PROCESS CONNECTION													
Code: <b>RL8</b> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Code: RL8 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>													
<p><b>B</b> PC polycarbonate loaded</p> <p><b>G</b> DIN A Aluminium varnished</p>  <p>Special <b>Z</b></p>	<p><b>THREADED</b></p>  <p><b>0 2</b> G 1" AISI316 <b>0 4</b> 1" NPT AISI316 <b>0 5</b> G 1" PVC</p> <p>3 ropes max.</p>	<p><b>SANITARY FITTING</b></p> <p><b>CLAMP "3A" CONFORM</b></p> <p><b>7 1</b> DN25 (1") AISI316L <b>7 3</b> DN38 (1 1/2") AISI316L <b>7 5</b> DN51 (2") AISI316L</p> <table border="1"> <thead> <tr> <th>DN</th> <th>A</th> <th>E</th> </tr> </thead> <tbody> <tr> <td>25 (1")</td> <td>50.5</td> <td>49</td> </tr> <tr> <td>38 (1 1/2")</td> <td>50.5</td> <td>49</td> </tr> <tr> <td>51 (2")</td> <td>64</td> <td>49</td> </tr> </tbody> </table> <p><b>9 9</b> Special</p>	DN	A	E	25 (1")	50.5	49	38 (1 1/2")	50.5	49	51 (2")	64	49
DN	A	E												
25 (1")	50.5	49												
38 (1 1/2")	50.5	49												
51 (2")	64	49												
<p><b>ELECTRODE NUMBER</b></p> <p>Code: <b>RL8</b> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/></p> <p><b>B</b> 1 <b>C</b> 2 <b>D</b> 3 <b>E</b> 4, 1" threaded excluded <b>H</b> 5, 1" threaded excluded <b>Z</b> Special</p>	<p><b>SW 60</b></p>  <p><b>1 2</b> G 1 1/2" AISI316 <b>1 8</b> G 1 1/2" PVC <b>1 9</b> G 1 1/2" PTFE</p>													
<p><b>ROPE Ø AND INSULATION TYPE</b></p> <p>Code: <b>RL8</b> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/></p> <p><b>8 1</b> Ø1 AISI316 PVC insulated <b>9 9</b> Special</p>														



applied solutions for the applications

